IFM560B

PCI Fax Modem 56K

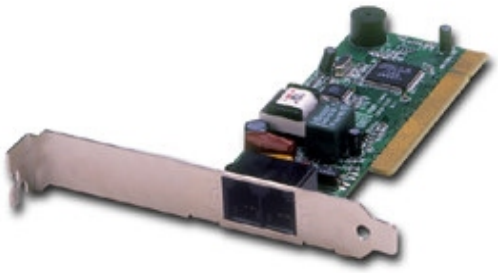

* PCI 2.1 Compliant Plug & Play interface
* Windows XP, Windows ME, Windows 2000, Windows 98, Windows 95/OSR2, Windows NT 4.0
* Hayes Compatible AT Commands
* Auto Speed/Mode Selection

SPECIFICATIONS

Data
K56flex, V.90, V.92, V.34bis, V.34, V.32bis, V.32, V.22bis, V.22, and V.21, Bell 212A and Bell 103

Fax
V.17, V.29, V.27ter, and V.21 channel 2 Group 3 send
And receive facsimile Error Correction V.42 and MNP 2-4 Data Compression V.42bis and MNP 5

Communication software compatible commands
- Hayes compatible enhanced "AT" command set
- Fax Service Class 1 commands

Built-in DTE interface
- DTE speed up to 115,200 bps
- 16C550 UART interface

SYSTEM REQUIREMENTS
* A telephone line with RJ-11 jack
* A CD-ROM drive
* Windows98/ ME/ 2000/XP or Windows NT pre-installed

Downloaded from www.Manualslib.com manuals search engine